


C900™

AWWA C900 LOADING CHART

Nominal Pipe Size in. (mm)	Outside Diameter Inches	Joints Per Bundle	Feet Per Bundle	*Feet Per Truckload
DR-25 PRESSURE CLASS 165				
4" (100)	4.800	50	1,000	14,000
6" (150)	6.900	28	560	7,280
8" (200)	9.050	15\18\20\24	300-480	4,400
10" (250)	11.100	8\12	160\240	2,560
12" (300)	13.200	3/4/6/8	60 - 160	1,960
DR-18 PRESSURE CLASS 235				
4" (100)	4.800	50	1,000	14,000
6" (150)	6.900	28	560	7,280
8" (200)	9.050	15\18\20\24	300-480	4,400
10" (250)	11.100	8\12	160\240	2,560
12" (300)	13.200	3/4/6/8	60-160	1,960
DR-14 PRESSURE CLASS 305				
4" (100)	4.800	50	1,000	12,000
6" (150)	6.900	28	560	6,720
8" (200)	9.050	10\15	200\300	3,800
10" (250)	11.100	8\12	160\240	2,560
12" (300)	13.200	3/4/6/8/9/12	60-240	1,820

Prices are subject to a firm policy of "Price in effect at time of shipment on regular purchases" *Current loading chart from the plant closest to your location can be found by visiting our website, dpcpipe.com
 *Possession of this page does not constitute an offer of sale"

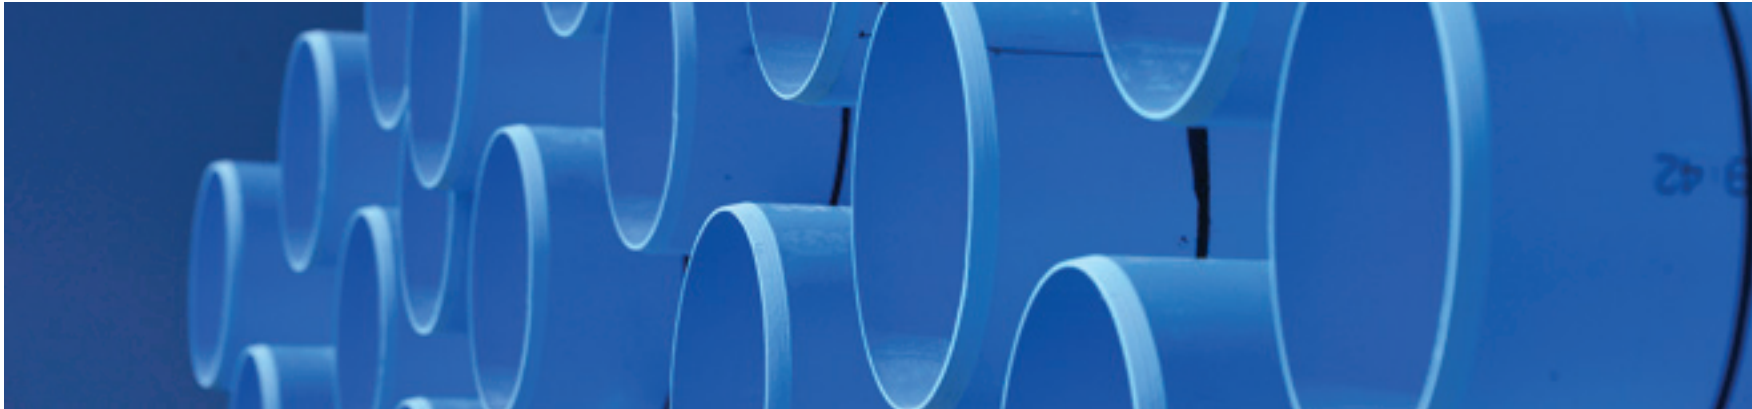

TRANS-21™ C900 14"-60" SPECIFICATION DATA

Nominal Pipe Size in. (mm)	A Outside Diameter Inches	B Bell Diameter Inches	D Assembly Mark 1: Inches *	E Assembly Mark 2: Inches *	t Minimum Wall Thickness: Inches
DR-14 PRESSURE CLASS 305 PSI					
14" (350)	15.300	19-1/2"	6-7/8"	7-7/8"	1.093
16" (400)	17.400	22"	7-3/4"	8-3/4"	1.243
18" (450)	19.500	24-1/2"	8-1/4"	9-1/4"	1.393
20" (500)	21.600	27"	9"	10"	1.543
24" (600)	25.800	32"	9-3/4"	10-3/4"	1.843
30" (750)	32.000	40"	12-5/8"	13-5/8"	2.286

Prices are subject to a firm policy of "Price in effect at time of shipment on regular purchases" *Current loading chart from the plant closest to your location can be found by visiting our website, dpcpipe.com *Possession of this page does not constitute an offer of sale"

TRANS-21™

AWWA C900 LOADING CHART

Nominal Pipe Size in. (mm)	Outside Diameter	Minimum Wall Thickness	Joints Per Bundle	Feet Per Bundle	*Feet Per Truckload
DR-81 PRESSURE CLASS 50 PSI					
36" (900)	38.300	0.473	2	40/44	160/176
42" (1050)	44.500	0.550	2	40/44	160/176
48" (1200)	50.800	0.628	1	20/22	80/88
54" (1350)	57.560	0.711	1	22	44E/88W
60" (1500)	61.610	0.760	1	22	44
DR-51 PRESSURE CLASS 80 PSI					
24" (600)	25.800	0.506	3	60/66	360/396
30" (750)	32.000	0.627	3	60/66	360/396W/264E
36" (900)	38.300	0.751	2	40/44	160/176
42" (1050)	44.500	0.872	2	40/44	160/176
48" (1200)	50.800	0.996	1	20/22	80/88
54" (1350)	57.560	1.128	1	22	44E / 88W
60" (1500)	61.610	1.208	1	22	44
DR-41 PRESSURE CLASS 100 PSI					
20" (500)	21.600	0.527	4	80/88	640/704
24" (600)	25.800	0.629	3	60/66	360/396
30" (750)	32.000	0.780	3	60/66	360/396W/264E
36" (900)	38.300	0.934	2	40/44	160/176
42" (1050)	44.500	1.085	2	40/44	160/176
48" (1200)	50.800	1.239	1	20/22	80/88
54" (1350)	57.560	1.404	1	22	44E / 88W
60" (1500)	61.610	1.502	1	22	44

Prices are subject to a firm policy of "Price in effect at time of shipment on regular purchases" *Current loading chart from the plant closest to your location can be found by visiting our website, dpcpipe.com *Possession of this page does not constitute an offer of sale"

CONTINUED NEXT PAGE



TRANS-21™

AWWA C900 LOADING CHART

DIAMOND PLASTICS

Nominal Pipe Size in. (mm)	Outside Diameter	Minimum Wall Thickness	Joints Per Bundle	Feet Per Bundle	*Feet Per Truckload
DR-32.5 PRESSURE CLASS 125 PSI					
16" (400)	17.400	0.535	2\3\4\6	40-132	1,000/1,100
18" (450)	19.500	0.600	4\6	80-132	800/880
20" (500)	21.600	0.665	4	80/88	640/704
24" (600)	25.800	0.794	3	60/66	360/396
30" (750)	32.000	0.985	3	60/66	360/396W/264E
36" (900)	38.300	1.178	2	40/44	160/176
42" (1050)	44.500	1.369	2	40/44	160/176
48" (1200)	50.800	1.563	1	20/22	80/88
54" (1350)	57.560	1.771	1	22	44E / 88W
60" (1500)	61.610	1.896	1	22	44
DR-25 PRESSURE CLASS 165 PSI					
14" (350)	15.300	0.612	6	120/132	1,440/1,584
16" (400)	17.400	0.696	2\3\4\6	40-132	1,000/1,100
18" (450)	19.500	0.780	4\6	80-132	800/880
20" (500)	21.600	0.864	4	80/88	640/704
24" (600)	25.800	1.032	3	60/66	360/396
30" (750)	32.000	1.280	3	60/66	360/396W/264E
36" (900)	38.300	1.532	2	40/44	160/176
42" (1050)	44.500	1.780	2	40/44	160/176
48" (1200)	50.800	2.032	1	20/22	80/88
54" (1350)	57.560	2.302	1	22	44E / 88W
60" (1500)	61.610	2.464	1	22	44
DR-21 PRESSURE CLASS 200 PSI					
14" (350)	15.300	0.729	6	120/132	1,440/1,584
16" (400)	17.400	0.829	2\3\4\6	40-132	1,000/1,100
18" (450)	19.500	0.929	4\6	80-132	800/880
20" (500)	21.600	1.029	4	80/88	640/704
24" (600)	25.800	1.229	3	60/66	360/396
30" (750)	32.000	1.524	3	60/66	360/396W/264E
36" (900)	38.300	1.824	2	40/44	160/176
42" (1050)	44.500	2.119	2	40/44	160/176

Prices are subject to a firm policy of "Price in effect at time of shipment on regular purchases" "Current loading chart from the plant closest to your location can be found by visiting our website, dpcpipe.com" "Possession of this page does not constitute an offer of sale"

CONTINUED NEXT PAGE

TRANS-21™

AWWA C900 LOADING CHART

Nominal Pipe Size in. (mm)	Outside Diameter	Minimum Wall Thickness	Joints Per Bundle	Feet Per Bundle	*Feet Per Truckload
DR-18 PRESSURE CLASS 235 PSI					
14" (350)	15.300	0.850	6	120/132	1,440/1,584
16" (400)	17.400	0.967	2\3\4\6	40-132	1,000/1,100
18" (450)	19.500	1.083	4\6	80-132	800/880
20" (500)	21.600	1.200	4	80/88	640/704
24" (600)	25.800	1.433	3	60/66	360/396
30" (750)	32.000	1.778	3	60/66	360/396W/264E
36" (900)	38.300	2.128	2	40/44	160/176
42" (1050)	44.500	2.472	2	40/44	160/176
DR-14 PRESSURE CLASS 305 PSI					
14" (350)	15.300	1.093	6	120/132	1,440/1,584
16" (400)	17.400	1.243	2\3\4\6	40-132	1,000/1,100
18" (450)	19.500	1.393	4\6	80-132	800/880
20" (500)	21.600	1.543	4	80/88	640/704
24" (600)	25.800	1.843	3	60/66	360/396
30" (750)	32.000	2.286	3	60/66	360/396W/264E

Prices are subject to a firm policy of "Price in effect at time of shipment on regular purchases" *Current loading chart from the plant closest to your location can be found by visiting our website, dpcpipe.com *Possession of this page does not constitute an offer of sale"

CONTINUED NEXT PAGE



DIAMOND PLASTICS



ASTM D2241

SPECIFICATION DATA

Nominal Pipe Size in. (mm)	A Outside Diameter Inches	t SDR 13.5 315 psi Inches	t SDR 17 250 psi Inches	t SDR 21 200 psi Inches	t SDR 26 160 psi Inches	t SDR 32.5 125 psi Inches	t SDR 41 100 psi Inches
MINIMUM WALL THICKNESS = (t)							
2" (50)	2.375	0.176	0.140	0.113	0.091		
2.5" (62.5)	2.875	0.213	0.169	0.137	0.110		
3" (75)	3.500	0.259	0.206	0.167	0.135		
4" (100)	4.500	0.333	0.265	0.214	0.173	0.138	0.110
6" (150)	6.625	0.491	0.390	0.316	0.255	0.204	0.162
8" (200)	8.625		0.508	0.410	0.332	0.265	0.210
10" (250)	10.750		0.632	0.511	0.413	0.331	0.262
12" (300)	12.750		0.750	0.606	0.490	0.392	0.311

Prices are subject to a firm policy of "Price in effect at time of shipment on regular purchases" "Possession of this page does not constitute an offer of sale" *Tolerance of +/- 1/4" allowed"

ASTM D2241

ASTM D2241 LOADING CHART

Nominal Pipe Size in. (mm)	Outside Diameter	Joints Per Bundle	Feet Per Bundle 20' laying lengths	*Feet Per Truckload 20' laying lengths	Feet Per Bundle 22' laying lengths	*Feet Per Truckload 22' laying lengths
SDR-41 PRESSURE RATING 100 PSI						
4" (100)	4.500	63	1,260	20,160	1,386	22,176
6" (150)	6.625	35\40	560/640/700/800	8,400	770\880	9,240
8" (200)	8.625	20\24	300/360/400/480	4,840	440\528	5,324
10" (250)	10.750	12\15	240/300	3,240	264\330	3,564
12" (300)	12.750	9\12	120/160/180/240	1,960	198\264	2,156
SDR-32.5 PRESSURE RATING 125 PSI						
4" (100)	4.500	63	1,260	20,160	1,386	22,176
6" (150)	6.625	35\40	560/640/700/800	8,400	770\880	9,240
8" (200)	8.625	20\24	300/360/400/480	4,840	440\528	5,324
10" (250)	10.750	12\15	240/300	3,240	264\330	3,564
12" (300)	12.750	9\12	120/160/180/240	1,960	198\264	2,156
SDR-26 PRESSURE RATING 160 PSI						
2" (50)	2.375	215	4,300	68,800	4,730	75,680
2.5" (62.5)	2.875	131	2,620	41,920	2,882	46,112
3" (75)	3.500	88/95	1,760/1,900	29,280	1,936/2,090	32,208
4" (100)	4.500	63	1,260	20,160	1,386	22,176
6" (150)	6.625	35\40	560/640/700/800	8,400	770\880	9,240

ASTM D2241

ASTM D2241 LOADING CHART CONTINUED

Nominal Pipe Size in. (mm)	Outside Diameter	Joints Per Bundle	Feet Per Bundle 20' laying lengths	*Feet Per Truckload 20' laying lengths	Feet Per Bundle 22' laying lengths	*Feet Per Truckload 22' laying lengths
SDR-26 PRESSURE RATING 160 PSI CONTINUED						
8" (200)	8.625	20\24	300/360/400/480	4,840	440\528	5,324
10" (250)	10.750	12\15	240/300	3,240	264\330	3,564
12" (300)	12.750	9\12	120/160/180/240	1,960	198\264	2,156
SDR-21 PRESSURE RATING 200 PSI						
2" (50)	2.375	215	4,300	68,800	4,730	75,680
2.5" (62.5)	2.875	131	2,620	41,920	2,882	46,112
3" (75)	3.500	88/95	1,760/1,900	29,280	1,936/2,090	32,208
4" (100)	4.500	63	1,260	20,160	1,386	22,176
6" (150)	6.625	35\40	560/640/700/800	8,400	770\880	9,240
8" (200)	8.625	20\24	300/360/400/480	4,840	440\528	5,324
10" (250)	10.750	12\15	240/300	3,240	264\330	3,564
12" (300)	12.750	9\12	120/160/180/240	1,960	198\264	2,156
SDR-17 PRESSURE RATING 250 PSI						
2" (50)	2.375	215	4,300	68,800	4,730	75,680
2.5" (62.5)	2.875	131	2,620	41,920	2,882	46,112
3" (75)	3.500	88/95	1,760/1,900	29,280	1,936/2,090	32,208
4" (100)	4.500	63	1,260	20,160	1,386	22,176
6" (150)	6.625	35\40	560/640/700/800	8,400	770\880	9,240
8" (200)	8.625	20\24	300/360/400/480	4,840	440\528	5,324
10" (250)	10.750	12\15	240/300	3,240	264\330	3,564
12" (300)	12.750	9\12	120/160/180/240	1,960	198\264	2,156
SDR-13.5 PRESSURE RATING 315 PSI						
2" (50)	2.375	215	4,300	68,800	4,730	75,680
2.5" (62.5)	2.875	131	2,620	41,920	2,882	46,112
3" (75)	3.500	88/95	1,760/1,900	29,280	1,936/2,090	32,208
4" (100)	4.500	63	1,260	20,160	1,386	22,176
6" (150)	6.625	35\40	560/640/700/800	8,400	770\880	9,240
8" (200)	8.625	20\24	300/360/400/480	4,840	440\528	5,324
10" (250)	10.750	12\15	240/300	3,240	264\330	3,564
12" (300)	12.750	9\12	120/160/180/240	1,960	198\264	2,156

Prices are subject to a firm policy of "Price in effect at time of shipment on regular purchases" *Current loading chart from the plant closest to your location can be found by visiting our website, dpcpipe.com *Possession of this page does not constitute an offer of sale"